

SST-Drop™ Cable Assembly

CORNING

Features and Benefits

OptiTap® connector technology

Industry standard for existing FTTx installations

Robust design keeps connector intact during installation

Integral pulling eye/connector cap designed for 100 lb maximum pulling tension

Ease of installation

Designed for rapid connection to external flush-mounted bulkhead adapters on terminals or closures; can be pulled through 1.25-in conduit

Standards

Approvals and Listings RDUP (RUS) Listed

Design and Test Criteria Telcordia GR-3120

As an industry leader in optical connectivity products, Corning designs and manufactures the SST-Drop™ cable assembly with factory-terminated, environmentally sealed and hardened connectors to reduce the cost and the time of drop cable deployment in optical access networks. The OptiTap® single-fiber drop cable assembly is specifically designed to significantly reduce required drop cable installation.

- Available with one or both ends connectorized
- Hybrid (one end with an OptiTap® Connector, one end with standard SC connector) available with or without pulling grip
- Available in dielectric or toneable
- Designed for aerial, direct-buried or duct installation
- Self-supporting at 40 lbf installation tension, 150 ft



OptiTap SST-Drop Cable Assembly | Photo PIM0501



SST-Drop Cable Assembly, Hybrid | Photo FOJP068

SST-Drop™ Cable Assembly



Specifications

Connector

Insertion Loss, Typical	0.15 dB
Reflectance, Typical	-65 dB

Cable Assemblies


Axial Pull, Plug to Adapter Coupling Strength	50 lb
Axial Pull, Plug to Cable, Through the Dust Cap	100 lb in axial pull with load applied to the dust cap
Cold Mate/Demate	-40 °C mechanical testing

* Cable span distances are subject to customer environmental load and sag specifications.

SST-Drop™ Cable Assembly

CORNING

Ordering Information

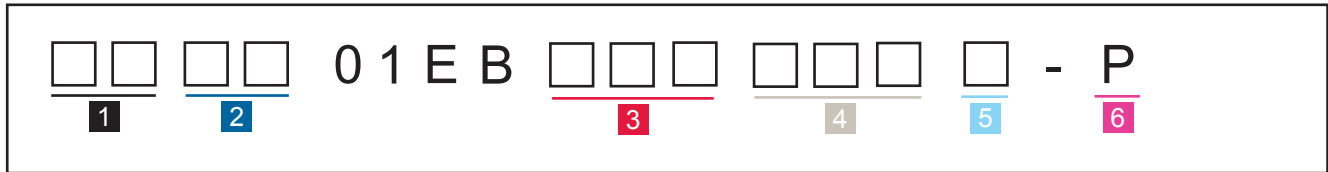

1 Select connector type for end one.

- 00 = No connector
- 43 = SC APC OptiTap Connector

2 Select connector type for end two.

- 43 = SC APC OptiTap Connector
- 44 = Simplex SC APC connector

3 Select cable type.

- 4FD = SST-Drop Dielectric
- 4H2 = SST-Drop Dielectric, heat-shrink furcation, 2.0 mm leg on simplex connector end
- 4H3 = SST-Drop Dielectric, heat-shrink furcation, 2.9 mm leg on simplex connector end
- 1TD = SST-Drop Toneable
- 1H2 = SST-Drop Toneable, heat-shrink furcation, 2.0 mm leg on simplex connector end
- 1H3 = SST-Drop Toneable, heat-shrink furcation, 2.9 mm leg on simplex connector end
- PFS = SST-Drop Dielectric, heat-shrink furcation, 2.0 mm leg on simplex connector end with pulling grip
- PTS = SST-Drop Toneable, heat-shrink furcation, 2.0 mm leg on simplex connector end with pulling grip

4 Select cable assembly length (3-digit length) for lengths under 999 ft.

Lengths:

Minimum: 2 m/6 ft

Meter lengths:

2, 3, 5 then 5 m increments to 600 m

Foot lengths:

6, 10 then 10 or 25 ft increments up to 2000 ft

Note: Contact PLM for extended length offerings.

5 Select cable assembly unit of length.

- F = Feet
- M = Meters



6 Defines packaging.

P = Individual packaging for all lengths. Shipping reel supplied with lengths > 350 ft

Table A: Alpha Codes for lengths ≥ 1000 ft

A00	=	1000
B00	=	1100
C00	=	1200
D00	=	1300
E00	=	1400
F00	=	1500
G00	=	1600
H00	=	1700
J00	=	1800
K00	=	1900
L00	=	2000

Part Number Example

Part Number	Product Description	Units per Delivery	
434301EB4FD200F-P	OptiTap® 1 F Single-Tube, OptiTap to OptiTap, Gel-Filled Cable Assembly, Single-mode (OS2), 200 ft	1/1	
434301EB1TD350F-P	OptiTap® 1 F Single-Tube, OptiTap to OptiTap, Toneable, Gel-Filled Cable Assembly, Single-mode (OS2), 350 ft	1/1	

CORNING

SST-Drop™ Cable Assembly

The logo consists of a solid blue square with the word "CORNING" in white, uppercase, sans-serif font centered within it.

**Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm**

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.
All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2018 Corning Optical Communications. All rights reserved.

The logo consists of the word "CORNING" in a large, black, uppercase, serif font.